

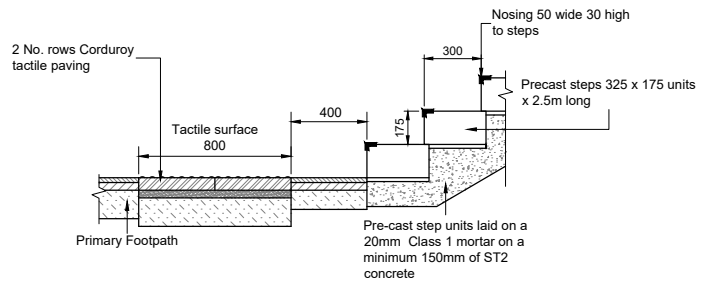
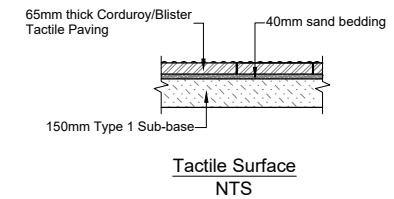



Handrails Details
 Not to Scale



Step and tactile paving detail at Bottom of Steps
 NTS

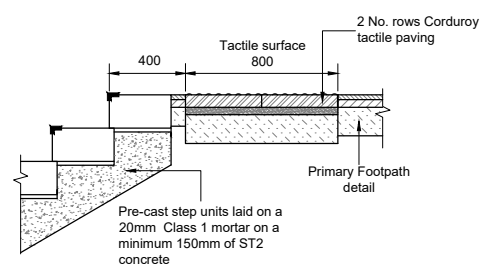

Step and tactile paving detail at Top of steps
 NTS

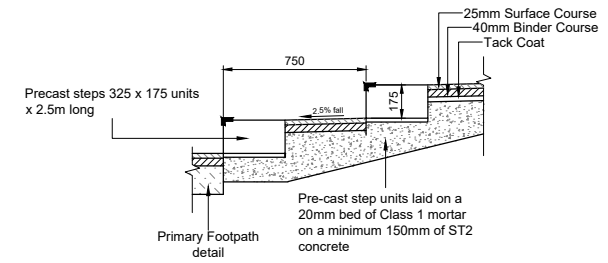

Step Detail
 NTS

Notes

- 1. All dimensions are in millimetres unless otherwise stated.
- 2. Step units shall be 'CE marked' precast concrete in accordance with Specification Clause 1770 AR and Appendix 17/70.
- 3. Steps shall be laid on a minimum of 150mm thick ST2 Concrete.
- 5. On steps, contrasting colour may be painted or applied as an integral part of the anti-slip surfacing in accordance with Specification Appendix 17/70.
- 6. Handrails shall be supported on new posts. The arrangement shown is indicative only. The design and layout of the handrail supports including foundations shall be in accordance with Specification Appendix 1/10. Method of fixing to be in accordance with the requirements in the Specification Appendix 1/10.
- 7. Handrails shall be in accordance with Specification Appendix 1/10. Rounded downturns or returns at ends of rails. No sharp edges permitted.

| Revision Details | | | |
|------------------|----------|------------|-------|
| Drawn by | Check by | Check Date | Surfx |



Project: Standard details.
 Title: Series 2600: Miscellaneous

Scale (at A4): Pre-cast steps

Scale (at A4): Not to scale

Drawn: JC Date: 07/2024

Checked: CHK Date: 07/2024

Drawing No: SD/2600/07 Rev: 1